

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
29 September 2005 (29.09.2005)

PCT

(10) International Publication Number
WO 2005/090058 A1

(51) International Patent Classification⁷: **B29C 70/76**,
B60J 10/00, B29C 31/04, 41/20, B05D 1/40

(21) International Application Number:
PCT/EP2005/051232

(22) International Filing Date: 17 March 2005 (17.03.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
04447070.6 19 March 2004 (19.03.2004) EP

(71) Applicant (for all designated States except US): **RECTI-
CEL** [BE/BE]; Plejadenlaan 15, B-1200 Brussels (BE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **DE WINTER,
Hugo** [BE/BE]; c/o RECTICEL, Damstraat 2, B-9230

Wetteren (BE). **LANGIE, Stijn** [BE/BE]; c/o RECTICEL,
Damstraat 2, B-9230 Wetteren (BE). **RAEYMACKERS,
Gert** [BE/BE]; c/o RECTICEL, Damstraat 2, B-9230
Wetteren (BE).


(74) Agents: **VAN REET, Joseph** et al.; Gevers & Vander
Haeghen, Holidaystraat 5, B-1831 Diegem (BE).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ,
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA,
ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,

[Continued on next page]

(54) Title: PANEL ASSEMBLY AND METHOD FOR ITS PRODUCTION

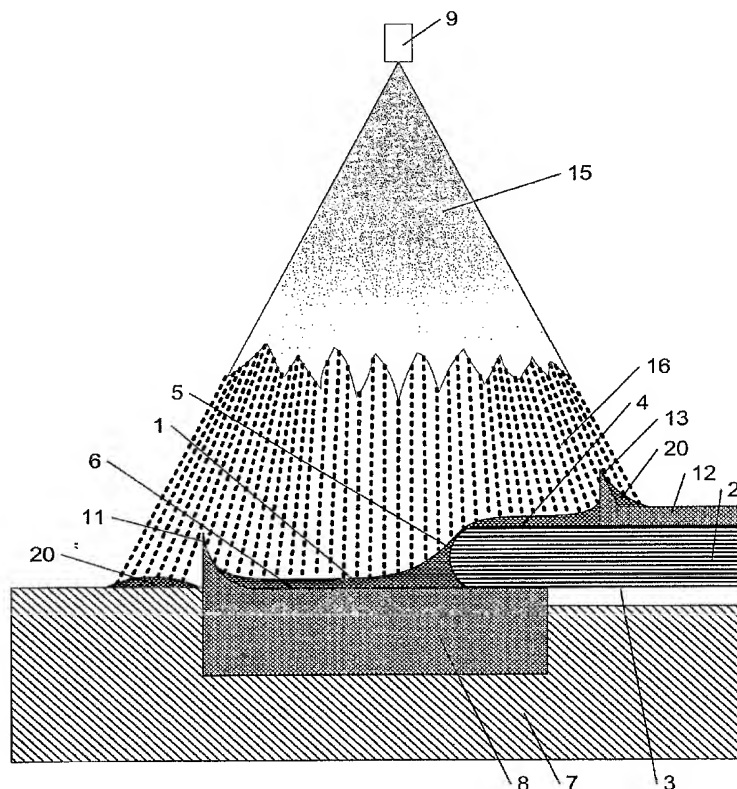

(57) Abstract: The panel assembly comprises a panel (2) and a gasket (1) adhered to the panel and extending along at least a portion of the periphery. For producing the panel assembly a curable composition is applied either directly or indirectly onto the panel and onto a mould surface (6) onto which the panel has been positioned. When being applied on the mould 5 surface, the curable composition has a dynamic viscosity which is lower than the dynamic viscosity of extrusion materials. In this way, a better surface quality can be achieved without having to exert a high pressure onto the curable composition. In contrast to the known RIM processes, the curable composition is not injected in a closed mould but is applied 10 onto an open mould surface by means of an applicator device (9) moving along at least said portion of the periphery of the panel (2). In this way, cheaper moulds can be used and in particular moulds made of a soft, resilient material (8).

WO 2005/090058 A1



GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.